


CONSERVATION RANGE

HERITAGE DOUBLE DOORS (OPEN OUT)

Our timber double doors are the classic French door set, available as either outward or inward opening.

This outward opening version offers flexible design options for traditional, contemporary or modern styling. The doors are suitable for a range of threshold options including mobility access.

The double doors are energy efficient and PAS 24:2016 certified for high security. The system is also Secured by Design.

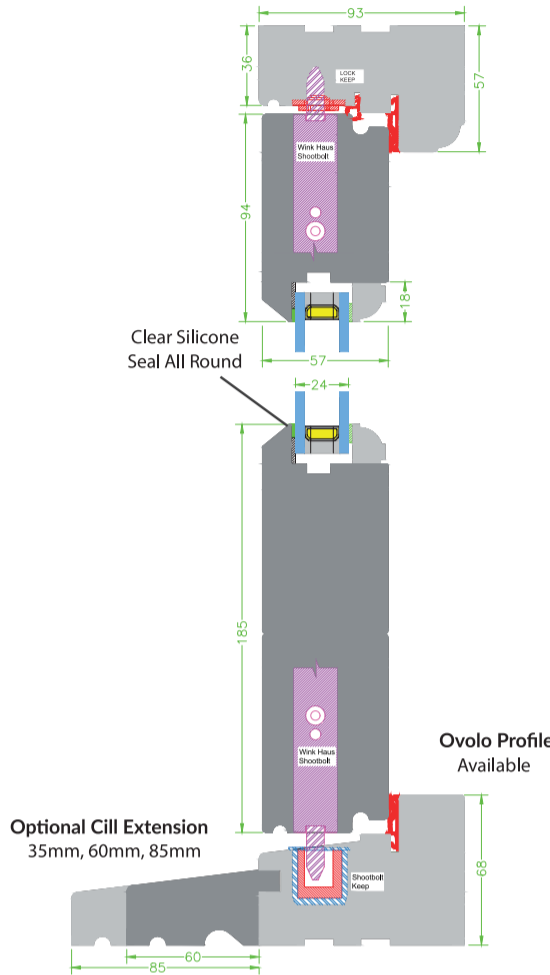

						
PAS24:2016 FOR SECURITY	SECURED BY DESIGN SYSTEM	DOCUMENT Q COMPLIANT	DOCUMENT L COMPLIANT	DOCUMENT M COMPLIANT	BS6375-1 2009 WEATHER TIGHTNESS	DOUBLE OR TRIPLE GLAZING

SPECIFICATION

Frame Options	93mm x 57mm Jamb 93mm x 68mm Head 93mm x 68mm Cill 93mm x 68mm Transom & Mullion
Door	94 x 57mm Top Rail & Stiles 160mm x 57mm Bottom & Mid Rail Overall meeting stile width – 190mm 22mm – Glazing Bar
Door Profile	Ovolo
Cill Projection	35mm, 50mm, 70mm, 90mm
Glazing	24mm Low E Sealed Unit (4mm/16mm/4mm) with Argon gas Black Warm Edge Spacer Options - Obscure, Sound Control, Toughened & Laminated, Security Bead & Clip glazing system

HARDWARE / FITTINGS

Hardware	Lift Off Radius Butt Hinges Multi-point Thunderbolt Lever handle set on each door
Handles	See Ironmongery brochure for vast range of lever handles in assorted finishes.
Trickle Vents	Surface mounted internal vent and external canopy 4600EA

TEST DATA

BS6375 Part 1	Air Permeability Class 2, Water tightness Class 3A Resistance To Wind Load Class 800X
Acoustic Rating	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
Thermal Rating	1.4 W/m²K (with double glazing)
Security	PAS 24 and Secured by Design where required