



est. 2011

JTP | JOINERY


CONSERVATION RANGE HERITAGE SINGLE DOOR (OPEN OUT)

Our timber entrance doors are available to open either outward or inwards.


This outward opening version is a popular option where there is limited space to open inwards, when used for mobility access or for rear doors.

The Document Q compliant door is energy efficient and highly secure. The door design is very flexible, allowing for various glass and solid panel combinations. This makes it easy to produce almost any style of door.

For wide entrances see the Double Door option.

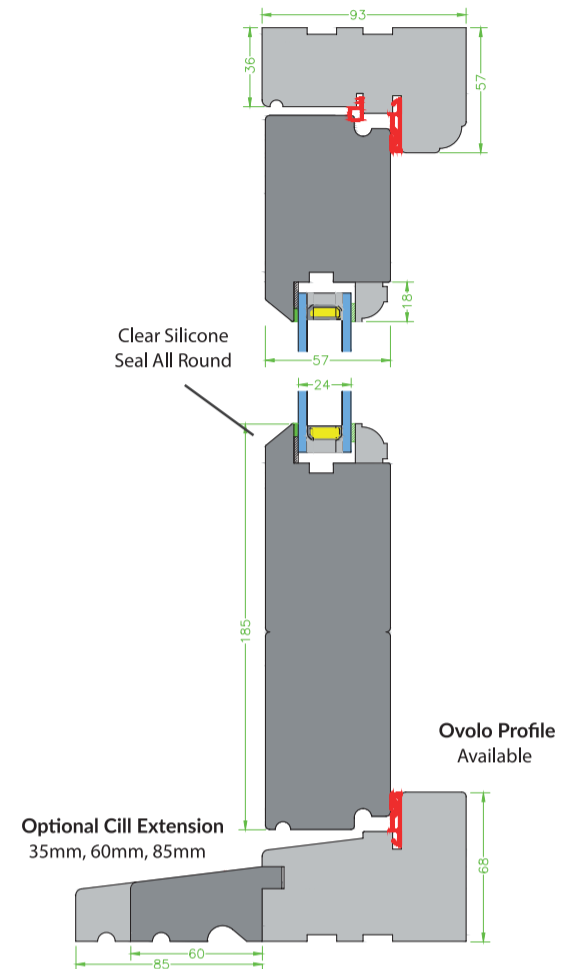

**PAS24:2016
FOR SECURITY**



**SECURED BY
DESIGN SYSTEM**



**DOCUMENT Q
COMPLIANT**



**DOCUMENT L
COMPLIANT**



**DOCUMENT M
COMPLIANT**



**BS6375-1 2009
WEATHER TIGHTNESS**



**DOUBLE OR
TRIPLE GLAZING**

SPECIFICATION

Frame Options	93mm x 57mm Jambs 93mm x 68mm Head 93mm x 68mm Cill 93mm x 68mm Transom & Mullion
Door	94 x 57mm Top Rail & Stiles 160mm x 57mm Bottom & Mid Rail 22mm - Glazing Bar
Door Profile	Ovolo
Cill Projection	35mm, 50mm, 70mm, 90mm
Glazing	24mm Low E Sealed Unit (4mm/16mm/4mm) with Argon gas Black Warm Edge Spacer Options - Obscure, Sound Control, Toughened & Laminated, Security Bead & Clip glazing system

HARDWARE / FITTINGS

Hardware	Lift Off Radius Butt Hinges Multi-point Thunderbolt or Slam Shut lock Lever Handle Option - Knob/Pull handle with additional cylinder pull Option - Letterplate
Handles	See Ironmongery brochure for vast range of all ironmongery in assorted finishes.
Trickle Vent	Surface mounted internal vent and external canopy 4600EA

TEST DATA

BS6375 Part 1	Air Permeability Class 2, Water tightness Class 3A Resistance To Wind Load Class 800X
Acoustic Rating	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
Thermal Rating	1.4 W/m ² K (with double glazing)
Security	PAS 24 and Secured by Design where required